



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

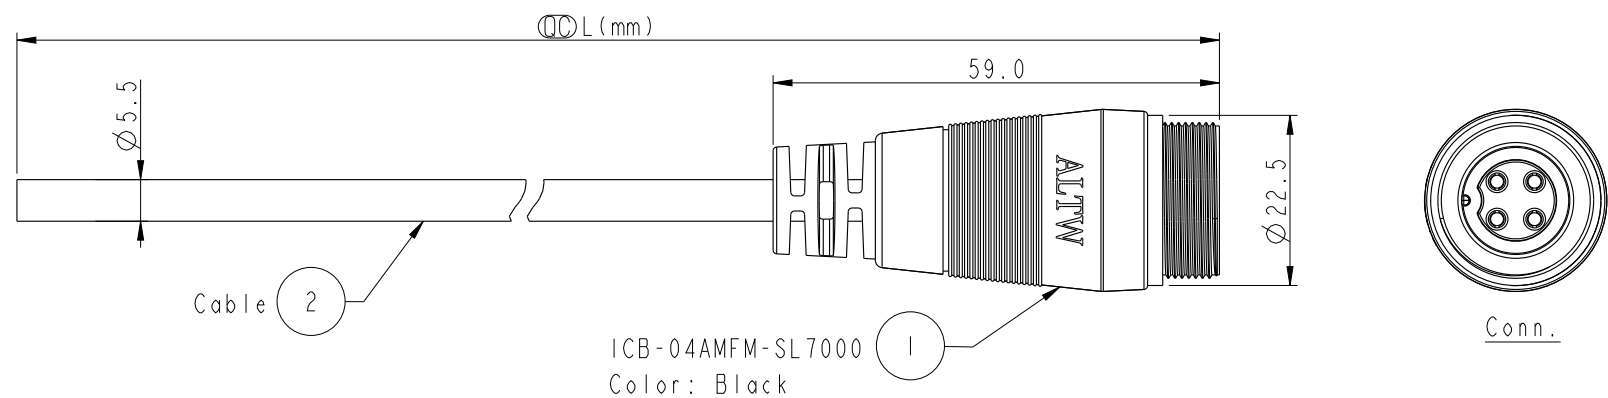


ICB-04AMFM-SL7000
Color: Black



ICB-04AMFM-SL7AXX

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
99 : 99Meters

Cable Length(L): 01~99Meters

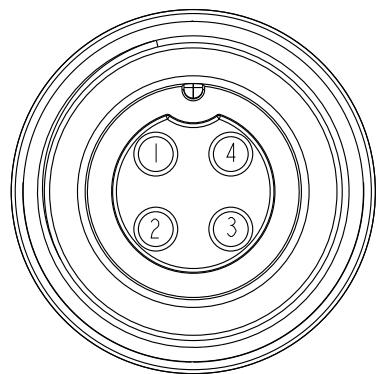

Pin Assignments
Front View

4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
Pin Out		

Note:
* ϕ Important Dimension To Check.
* Waterproof Rate: IP67
* Housing: Nylon+GF, Black.
* Female Pin: Copper Alloy, Gold Plated.
* Cable: UL2464 20AWG*4C+D+AI/My
PVC Jacket UV Resistant, OD=5.5, Black.
* Cable Length Tolerance: 01M: 40mm
02M~05M: ± 60 mm
06M~10M: ± 100 mm
11M~30M: ± 200 mm
31M~99M: ± 500 mm

UNIT:mm	
TOLERANCE	± 0.5

TITLE MIDDLE CNC PIN CABLE SCREW 4P M CONN F PIN			
SCALE 1:1	SIZE A4	SHEET 1	OF 1
REV. A	WC-REV. A.1	ϕ Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Tom_gu	DATE 2013-12-21
DWG NO ICB-04AMFM-SL7AXX	CHECKED BY Mafei	DATE 2013-12-21
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013-12-21