





1	2	3	4	5	6	7	8	
				REV.	ECN NO.	DATE	SIGN	DESCRIPTION
				A	Initial Release	2012/10/23	Ruru	MAT7-04AMFM-LL7AXX To MAB-04AMFM-LL7AXX
				B	LEN1520182~185	2015/02/02	Ruru	Change Logo



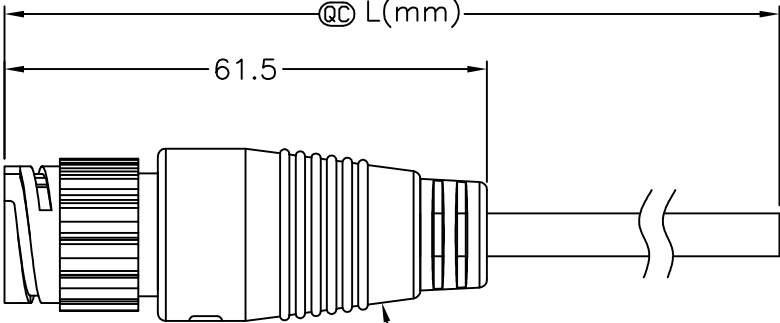

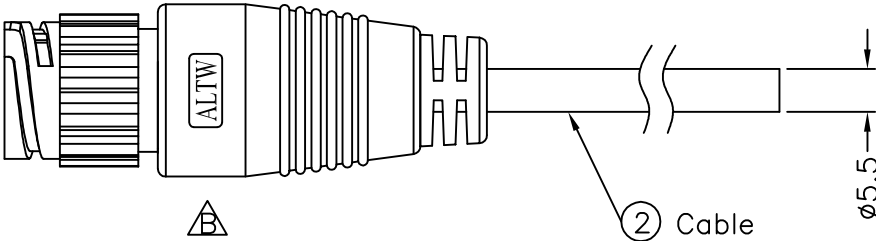




Pin Assignments
Front View 前視圖

1	Brown	(20AWG)	棕
2	Blue	(20AWG)	藍
3	Black	(20AWG)	黑
4	White	(20AWG)	白
Conn.	Wire Color		




MAB-04AMFM-LL7AXX

XX:01~99Meter
01:01Meter
02:02Meters
:
99:99Meters

Cable Length(L):01~99Meters

Note:

- * @Q Important Dimension
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * O-Ring: Silicone, Blue
- * Female Pin: Copper Alloy, Gold Plated
- * Cable:UL2464 20AWG*4C+D+A, OD=5.5mm, Black
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm



① MAB-04AMFM-LL7000
Color: Black

② Cable

UNIT:mm

TOLERANCE

±0.5 mm

TITLE

CABLE 2LOCK 4P M CONN F PIN

SCALE Free

SHEET 1 OF 1

REV. B

SIZE A4

QC :Inspection Item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

CUSTOMER

DRAWN BY

CHECKED BY

APPROVED BY

DATE

DATE

DATE

1	2	3	4	5	6	7	8	
				8 FMW0702-01-01A2				

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.