







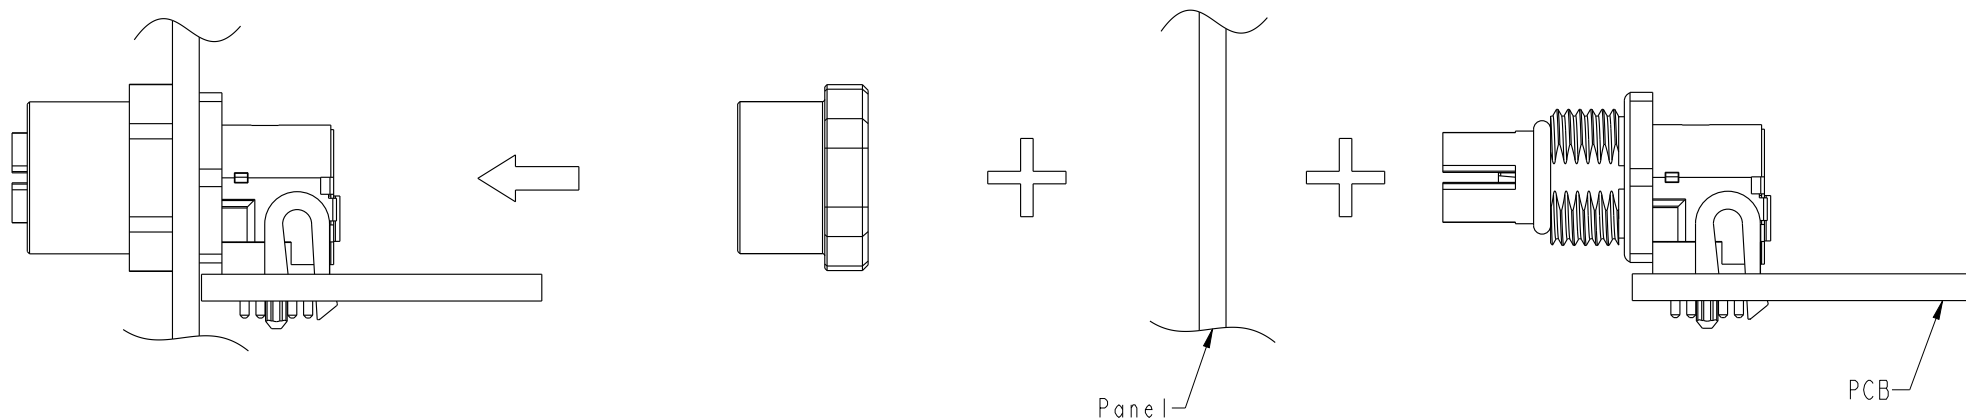



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Assembly:




- Note:
- * RoHS Compliant
 - *  Important dimension
 - *  Waterproof rate: IP67, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Gray
 - *  Shield: Metal
 - *  Nut: Metal
 - O-Ring: Rubber, Gray
 - For panel thickness: 1.0~4.0mm
 - For pcb thickness: 1.6~2.4mm
 - *  Connector nut is packed separately in pe bag

UNIT:mm						TITLE			
TOLERANCE		SCALE		SIZE		SHEET		OF	
.X		Free		A4		2		2	
.XX		REV.		WC-REV.		.0		 :Inspection item	
.XXX		1							
ANGLES									
±0.25									
±0.1									
±0.05									
±1°									

N SEN, M12 X -SHLD, SCREW
RECEPTACLE, F, F, PCB R

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO		DRAWN BY		DATE	
		Xiaofeng		2019/11/01	
DWG NO		CHECKED BY		DATE	
 MSXS-XXPFFR-SF7003		Feng-Li		2019/11/01	
CUSTOMER		APPROVED BY		DATE	
ALTW		Jerry		2019/11/01	